



SPFBK-13DC



SPFBK-13DC+C5

Descripción

La serie SPFBK de selladoras cosedoras automáticas son aptas para bolsa de papel kraft de capa simple, múltiple o con lámina plástica. Hacen el proceso completo de dobles del borde, corte, sellado, cosido, etc. mediante avanzada tecnología y bajo consumo de electricidad.

Hay 9 modelos diferentes según las necesidades de producción.

Especificaciones

	SPFBK-12C	SPFBK-13C	SPFBK-13DC	SPFBK-14C	SPFBK-14DC
Voltaje (V/Hz)	AC 380/50				
Gross power(KW)	3	4	4.5	5	5.5
Consumo sellado(W)	500x4	500x6		500x8	
Consumo motor selladora (KW)	0.4				
Consumo motor cosedora (KW)	0.4				
Velocidad (m/min)	7-10				
Paper tape	○	○	○	○	○
Deduster	×	×	○	×	○
Applications	Thermosol paper tape	Three-ply Paper Bag Thermosol paper tape Plastic Bag with Inner PE Film		Four-ply Paper Bag Thermosol paper tape Plastic Bag with Inner PE Film	
Dimension(LxWxH) (mm)	2450x1125x1880	2650x1125x1880	3050x1125x1880	2900x1125x1880	3350x1125x1880
Net weight(kg)	400	450	500		550



	SPFBK-23C	SPFBK-23DC	SPFBK-24C	SPFBK-24DC
Voltage(V/Hz)				
Gross power(KW)	4	4.5	5	5.5
Consumo sellado (W)	500x6		500x8	
Consumo motor sellado (W)	0.4			
Consumo motor cosedora (KW)	0.4			
Velocidad (m/min)	7-10			
Paper tape	△	△	△	△
Deduster	×	○	×	○
Applications	Three-ply Paper Bag Plastic Bag with Inner PE Film		Four-ply Paper Plastic Bag with Inner PE Film	
Dimension (LxWxH) (mm)	2420x1125x1880	2850x1125x1880	2630x1125x1880	3050x1125x1880
Net weight(kg)	420	450		500


○ = Thermosol paper tape △ = Crepe paper tape × = Not available

- The minimum distance between the top of bag and inside material should be 170mm.
- Sealing temperature:0 ~ 400
- Compressed air consumption:200NI/min , Pressure:5kg/cm²
- Sealing height:900 ~ 1450mm
- Deduster power: 0.6KW
- Exhaust device is optional.
- Heat seal tape (over tape) device is available

SELECTION OF BAG TOP PACKAGING


Paper bag

First stitched, then thermosol paper tape sealed for heating closure.

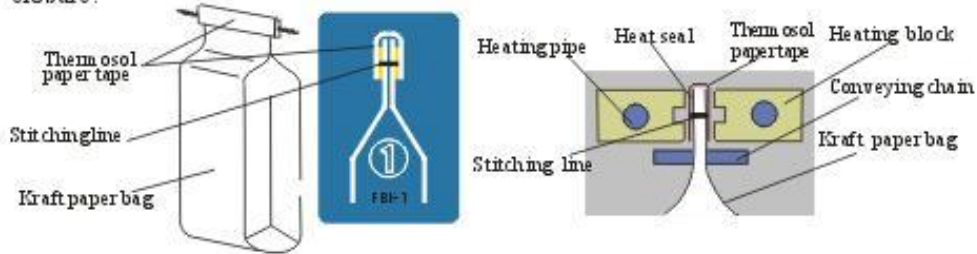


Paper Bag Inside Lining PE Film

First stitched, then thermosol paper tape sealed for heating closure simultaneously heat seal inner PE bag.

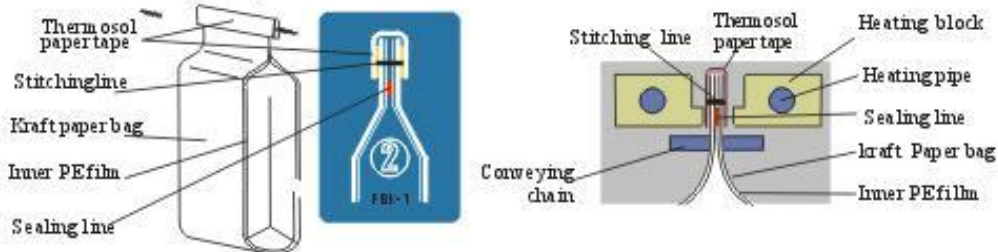

Paper Bag Inside Lining PE Film

First sealed inner PE film then sealed crepe paper tape for stitch.

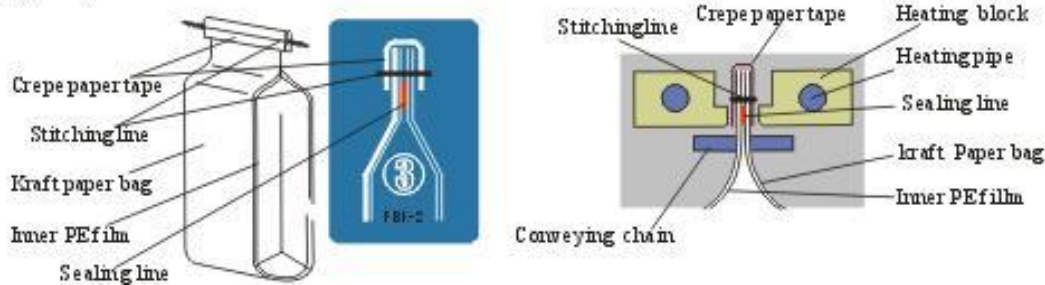

Procedure sequence

